

APPLICABILITY

1. DETAIL TO BE USED IN DOWNTOWN FRANKLIN IN MAIN STREET CORRIDOR


POLE AND APPURTENANCES

1. ROUND TAPERED POLE
2. STEEL, 16-SHARP FLUTED SHAFT
3. TENON: 3" 3"
4. (1) COLUMBIA SERIES 24" CAST IRON CLAMSHELL BASE, 2 HAND HOLES 180° FROM EACH OTHER
5. (1) GFI RECEPTACLE, / SMALL IN-USE WEATHERPROOF COVER
6. (1) 50A/240V RECEPTACLE / WEATHERPROOF COVER
7. (1) BOLT-ON 30" BANNER ARM, 1" PIPE, HALF SPHERE FINIAL
8. (1) BOLT-ON EYEBOLT
9. (1) 4" 6" HANDHOLE, LESS ANCHOR BOLTS
10. PHILADELPHIA SERIES CROSSARM, 36" LONG FOR MOUNTING 2 FIXTURES 180°
11. FINISH: RP99P024 FRANKLIN GREEN 80 GLOSS
12. (1) SET 3/4" 18" ANCHOR BOLTS (HOT-DIP GALV.)

	ORIENTATION	HEIGHT
RECEPTACLE	270°	11'-6"
RECEPTACLE	180°	1'-6"
BANNER ARM	90°	11'-3"
EYEBOLT	90°	6'-3"

FIXTURE

1. GLASS WASHINGTON POSTLITE LED3
2. P30 LED PERFORMANCE PACKAGE (8,100 LUMENS)
3. 3000K CCT
4. AUTO-SENSING 120-277V 56/60 H
5. ENHANCED STYLE, HINGED DOOR HOUSING
6. GLASS, TYPE III LUNAR OPTIC
7. CUSTOM MATCH COLOR FINISH HOUSING
8. SPIKE FINIAL, CUSTOM MATCH COLOR FINISH
9. FIELD AD USTABLE OUTPUT
10. NEMA TWISTLOCK DIMMING PHOTOCONTROL RECEPTACLE - 7 PIN (UNDER GLASS)
11. SHORTING CAP

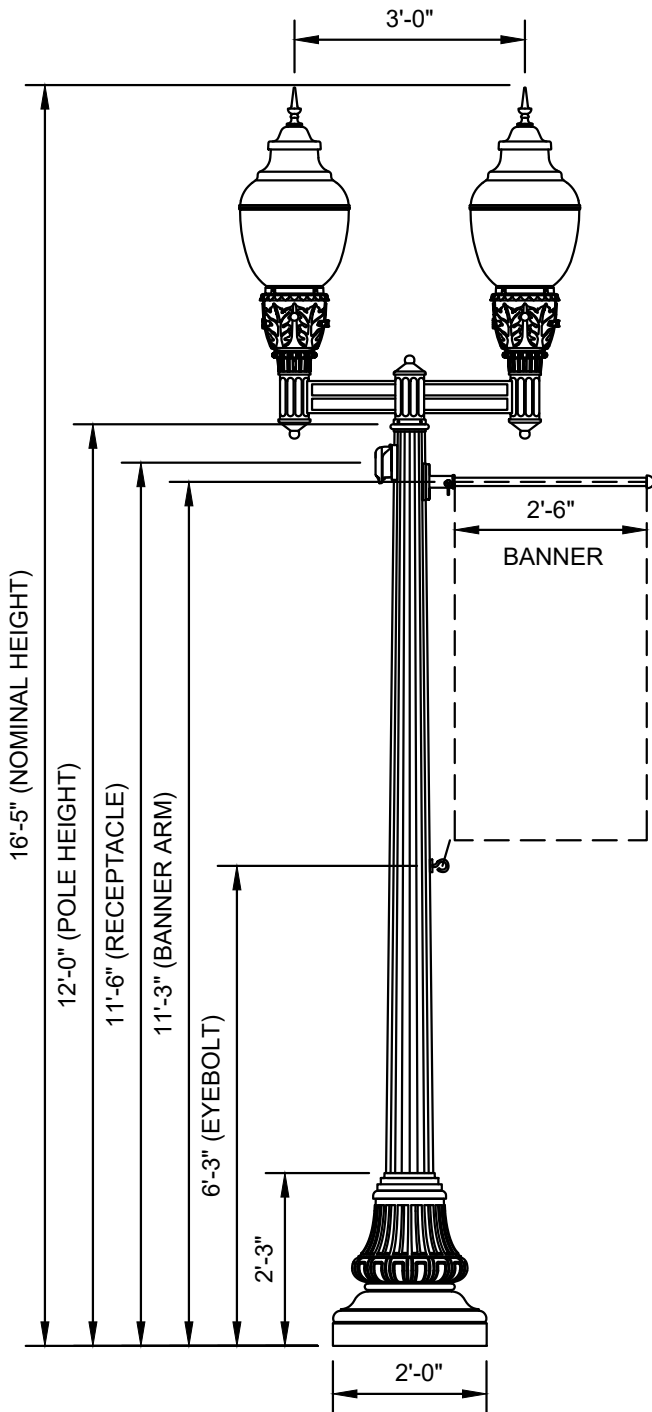

STREETSCAPE LIGHT POLE (TYPE MS-2)

DWG. NO.

L-4



HISTORIC
FRANKLIN
TENNESSEE

CITY OF FRANKLIN

NOT TO SCALE

CITY
ENGINEER:

Paul P. Hoyle

DATE:

7/1/2024