




R7-8 (12"x18")



R7-8P (18"x9")


NOTE: FOR EVERY SIX OR FRACTION OF SIX PARKING SPACES REQUIRED, AT LEAST ONE SHALL BE A VAN PARKING SPACE WITH THE R7-8P SUPPLEMENTARY SIGN.

31"

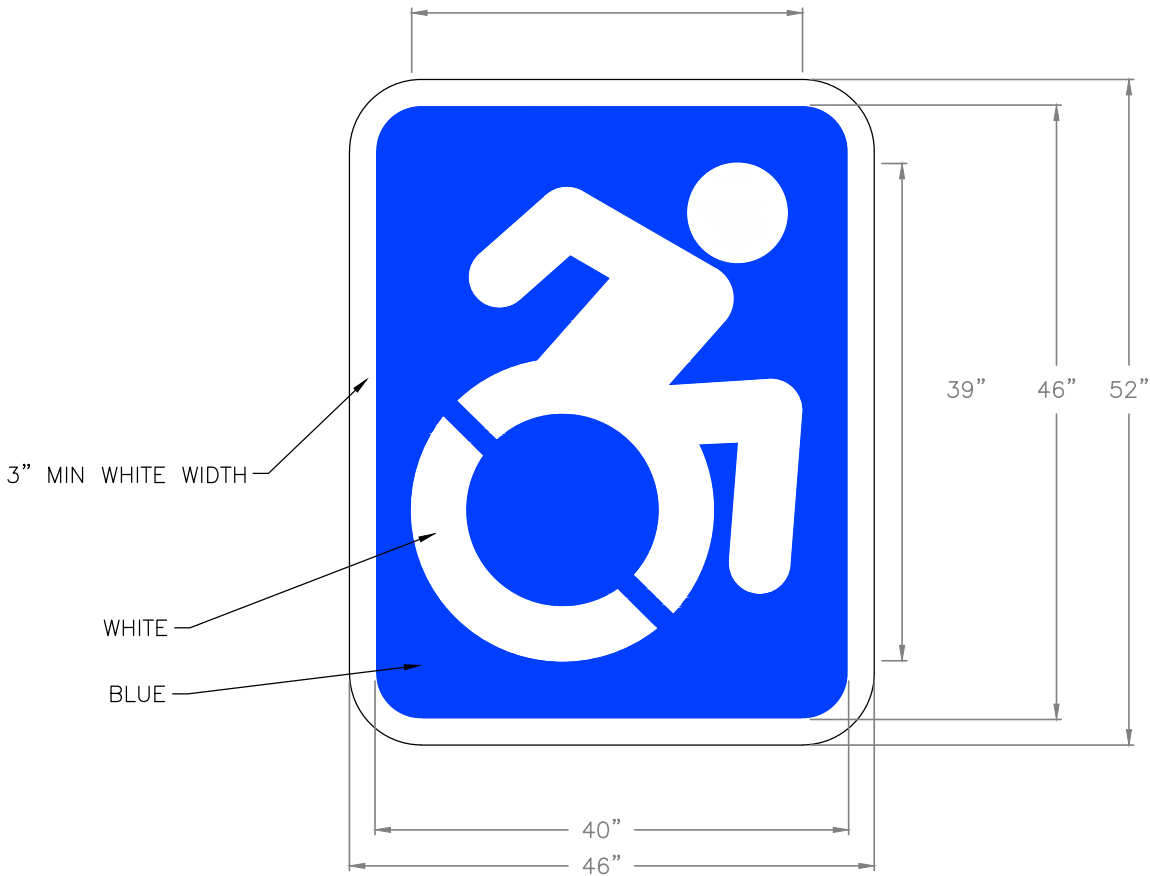

GENERAL NOTES

1. ALL PAVEMENT MARKINGS SHALL BE THERMOPLASTIC.
2. COORDINATE INSTALLATION WITH STANDARD GROUND MOUNTED SIGN DETAIL DRAWING.
3. SEE SITE PLAN FOR LOCATION. SIGNS MAY BE MOUNTED ON THE SAME POST AS SHOWN ON THE SITE PLAN.
4. ALL SIGNS MUST BE FABRICATED WITH REFLECTIVE MATERIALS. ALL REFLECTIVE MATERIALS MUST QUALIFY AS HIGH INTENSITY PRISMATIC GRADE. ALL SIGNS MUST HAVE A MINIMUM 7-YEAR MATERIALS WARRANTY.
5. SHOP DRAWINGS SHALL BE SUBMITTED TO THE CITY OF FRANKLIN FOR REVIEW AND APPROVAL PRIOR TO ORDERING/INSTALLATION.



**PLASTIC PAVEMENT MARKING (ACTIVE HANDICAP SYMBOL) AND RESERVED PARKING FOR ACCESSIBILITY SIGNS**

DWG. NO.

**CS17**

CITY OF FRANKLIN

CITY ENGINEER:

DATE:

03/20/2023

NOT TO SCALE